



# PRIME

**NOW VERSION**


**100% MADE IN ITALY**

**ITALFILE®**

ITALFILE® Srl • Via Gualda, 11 • 36075 Montecchio Maggiore (VI) Italy  
Tel. +39 0444 371303 • info@italfile.it • www.italfile.it

# PRIME

NOW VERSION

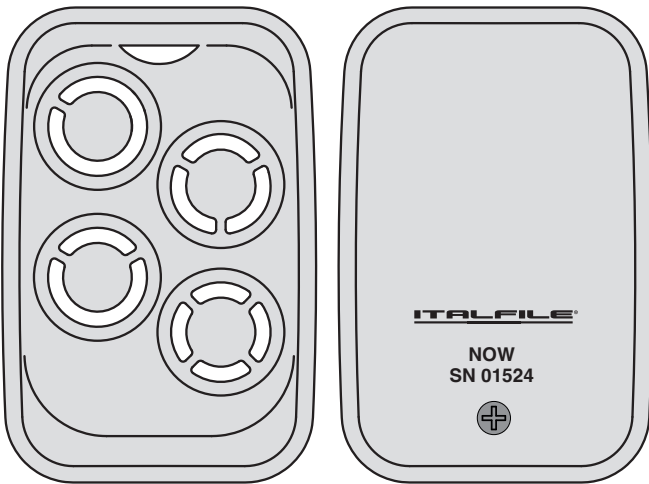

Compatible with most fixed-code and rolling-code remote controls with different frequencies for each individual button, excluding frequencies from 20 to 40 MHz



Dual Led  
Green = fixed code  
Red = Italfile rolling code



Battery CR2032



Shockproof coating

## DISPOSAL

None of the product components have any particular risks. The various parts must be separated by type (plastic, electric parts, battery).

## DECLARATION OF CONFORMITY

The manufacturer ITALFILE S.R.L. declares that the radio equipment type Prime version NOW SN01524 is compliant with Directive 2014/53UE (RED). The full text is available at: [www.italfile.it](http://www.italfile.it)

Montecchio Maggiore Vicenza 09/11/2022

Responsible person, Pellattiero 

## TECHNICAL CHARACTERISTICS

BAND 433 MHz	From 433.03 to 435.43 MHz
BAND 868 MHz	From 868.03 to 870.43 MHz
POWER	-6 dBm
SUPPLY	CR2032 battery
CODE	OOK/FSK
CHANNEL NUMBER	2



# INDEX

LEGEND OF LED SYMBOLS	p. 4
ROLLING CODE DUPLICATION PROCEDURE STANDARD	p. 5
FIXED CODE DUPLICATION PROCEDURE	p. 6
BFT® CODE DUPLICATION PROCEDURE	p. 7
FAAC®/GENIUS® CODE DUPLICATION PROCEDURE	p. 8
AVIDSEN®/V2® CODE DUPLICATION PROCEDURE	p. 9
BFT®/FAAC®/GENIUS® CODE DUPLICATION PROCEDURE FROM PRIME TO A NEW PRIME	p. 10
IDENTICAL COPY PROCEDURE	p. 11
ALL BUTTONS PROCEDURE	p. 12
CONTINUOUS TRANSMISSION PROCEDURE	p. 13
MANUAL RECEIVER STORAGE	p. 14
AUTOMATIC RADIO RECEIVER STORAGE	p. 15
DIRECT LEARNING	p. 16
HIDDEN BUTTON/SOURCE FUNCTION	p. 17

# LEGEND OF LED SYMBOLS



Green led



Red led



Led off




Pause




Slow flashes



Quick flashes



Green steady light









Red steady light

---












# FIXED CODE DUPLICATION PROCEDURE

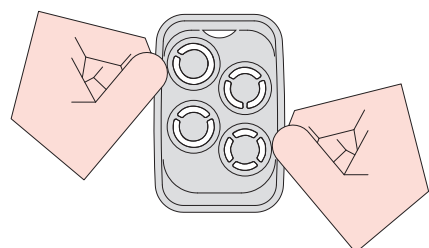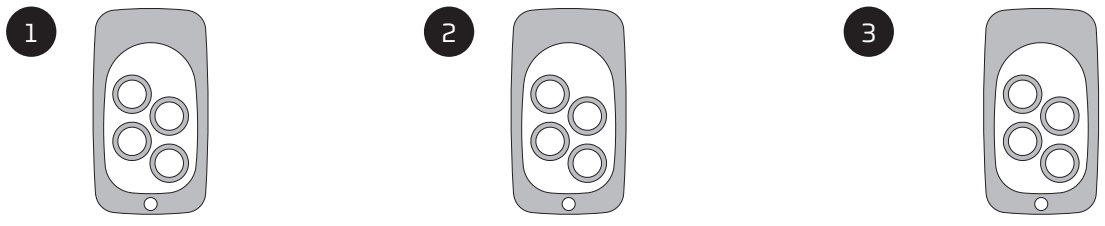

Press both Prime buttons simultaneously

Release when the Led flashes


Press the button you want to store

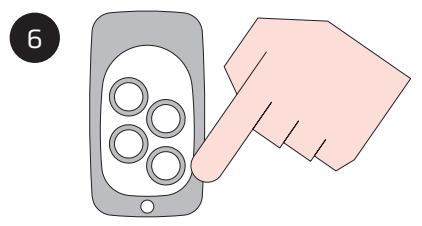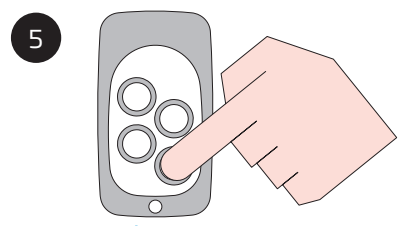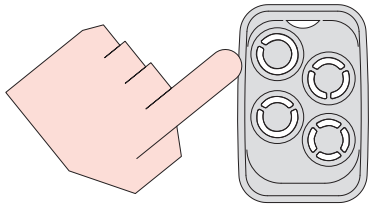

Release when the Led flashes rapidly

Press the button on the original remote control that you want to duplicate

When the Led turns solid green, release and wait for it to turn off



Once the procedure is complete, the programmed button will transmit the signal with the GREEN LED and will be immediately operational. **DIRECT LEARNING.**










# FAAC®/GENIUS® CODE DUPLICATION PROCEDURE

The procedure should only be performed if the original remote control is a master, that is, when pressing one of the buttons causes the Led to flash twice. If the Led remains steady, the procedure cannot be executed.

### WARNING:

All these remote control models have the button sequence as shown in the diagram below.

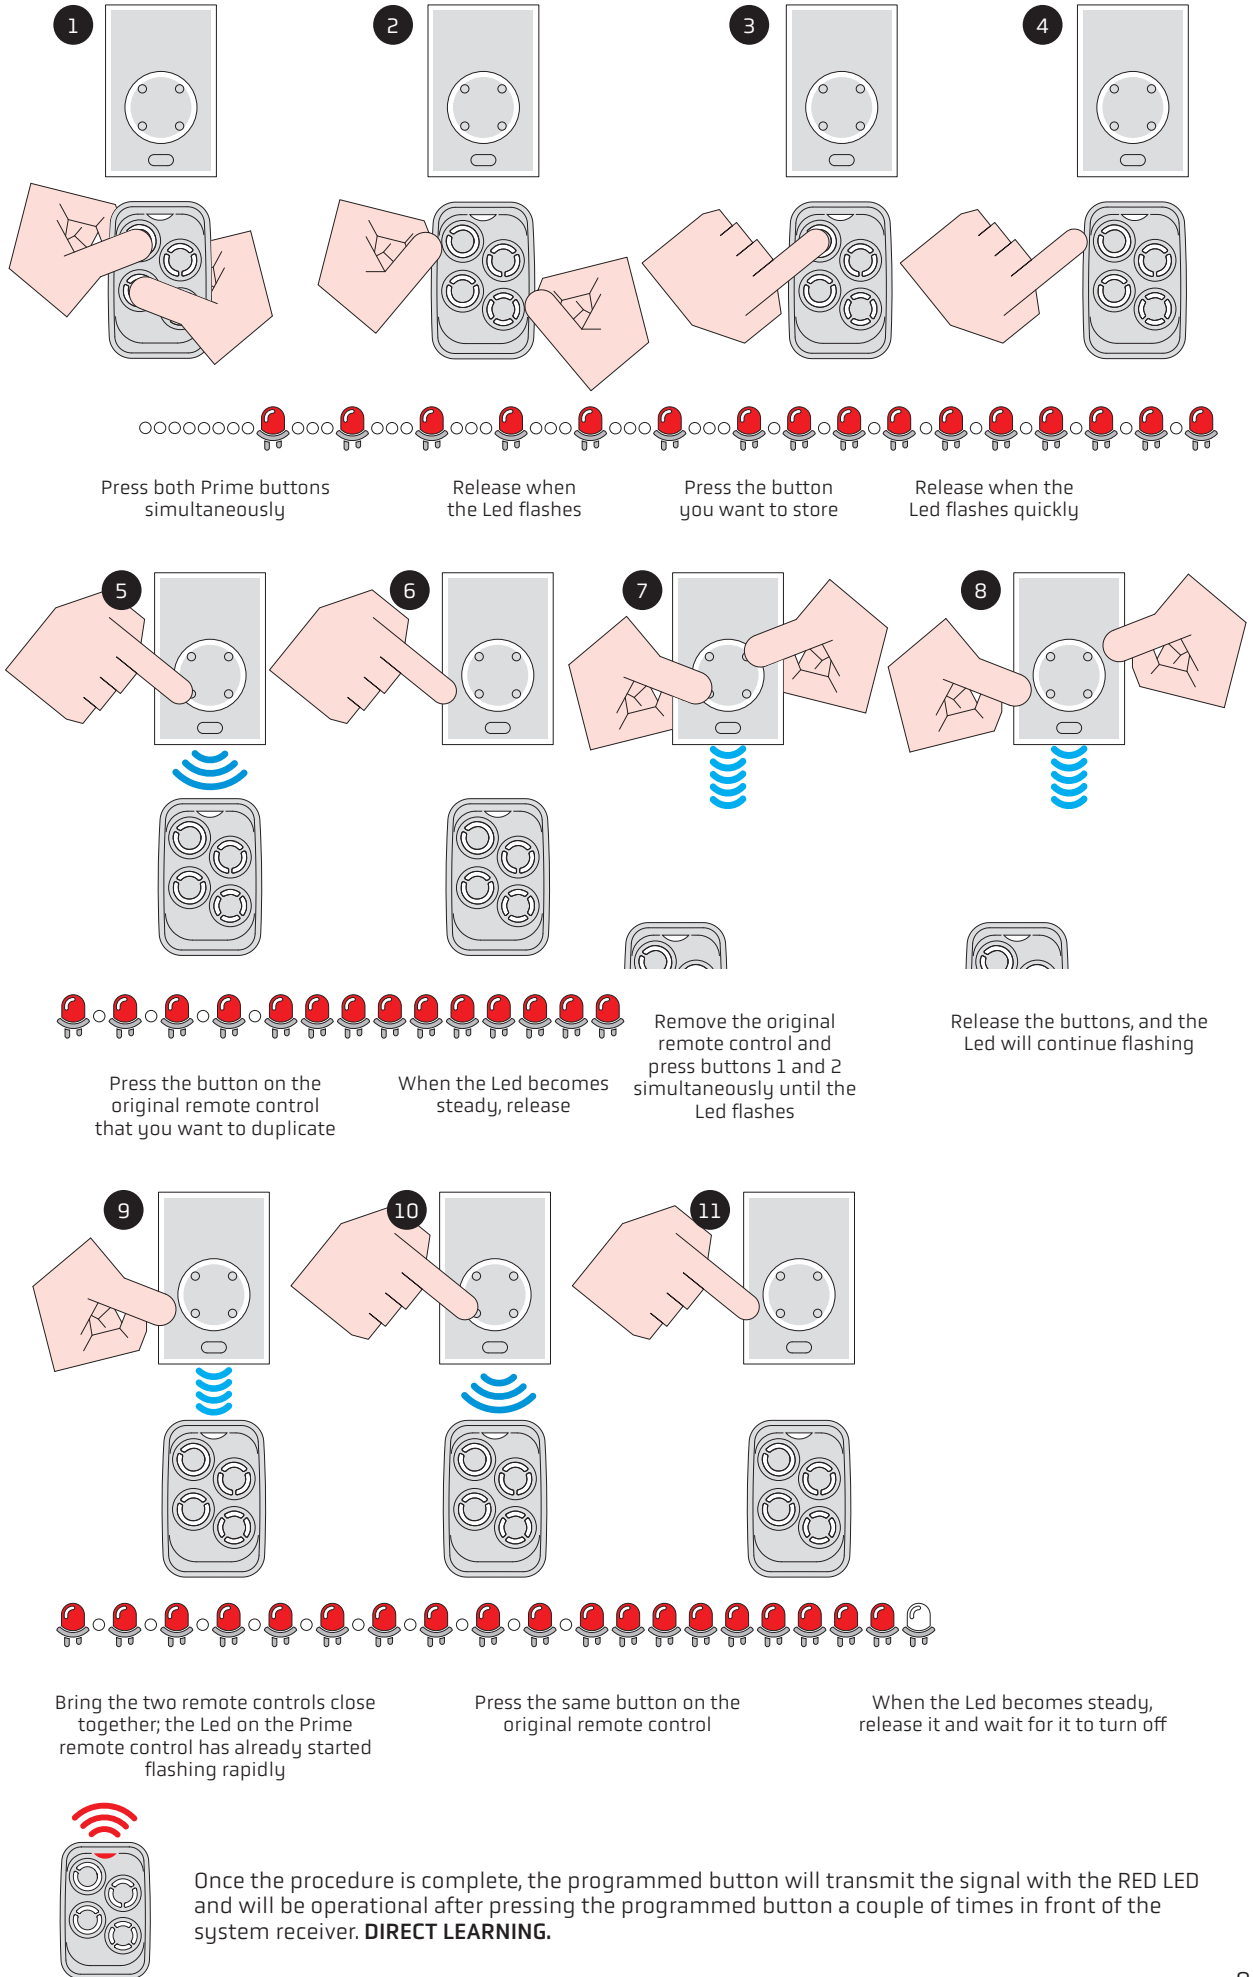










# BFT®/FAAC®/GENIUS® CODE DUPLICATION PROCEDURE FROM PRIME TO A NEW PRIME

**A** Already programmed remote control



**B** New remote control to be programmed

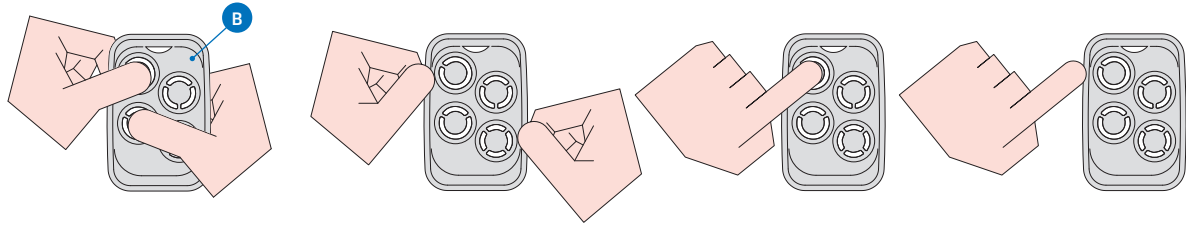

Press both buttons simultaneously      Release when the Led flashes      Press the button you want to store      Release when the Led flashes rapidly

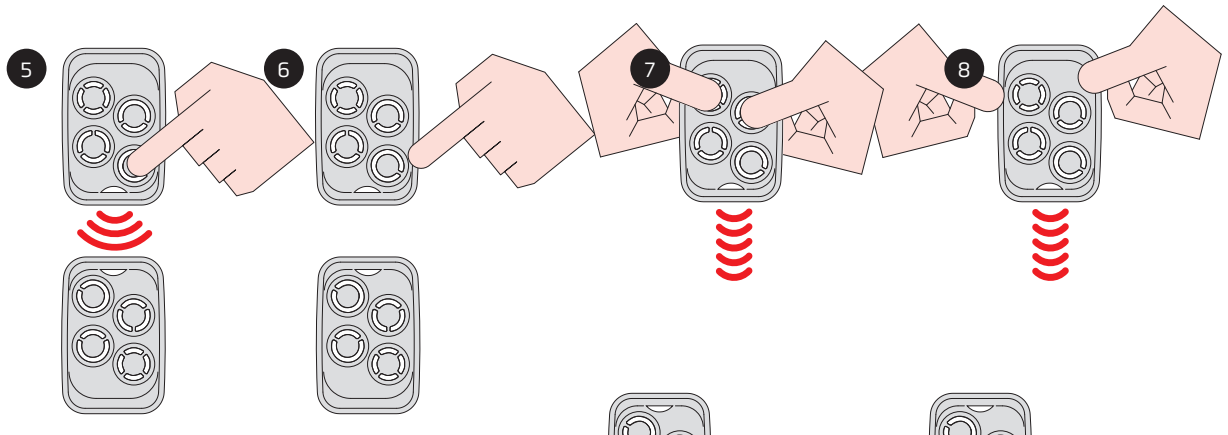

Press the button you want to duplicate      When the Led becomes steady, release      Move the remote control away and press both buttons simultaneously until the Led flashes      Release both buttons

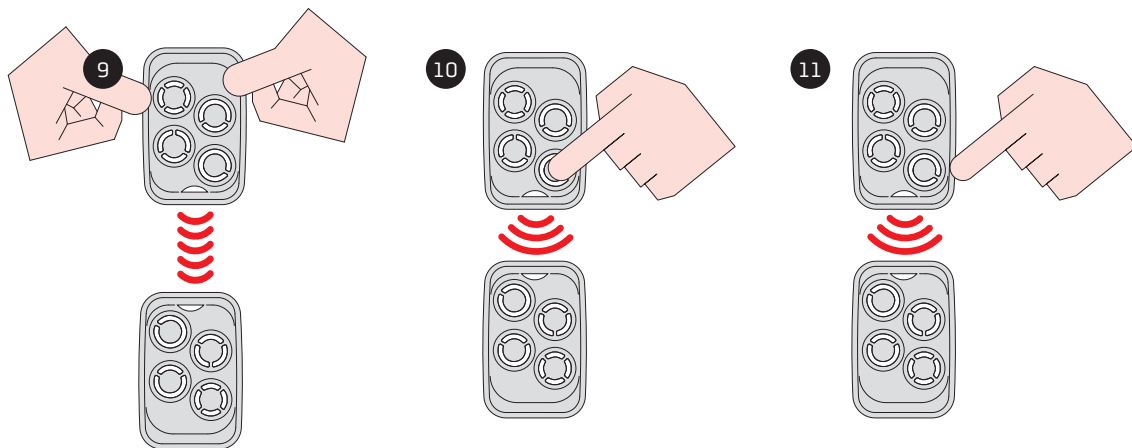

Bring the two remote controls close together; the Led on the new Prime has already started flashing rapidly again      Press the same button that you want to duplicate again      When the Led becomes steady, release it and wait for it to turn off





Once the procedure is complete, the programmed button will transmit the signal with the RED LED. To make it work, for BFT® you will need to perform **AUTOMATIC RADIO RECEIVER STORAGE**, while for FAAC®/GENIUS® it will be operational after pressing the programmed button a couple of times in front of the system receiver. **DIRECT LEARNING.**





# ALL BUTTONS PROCEDURE

This procedure is used when more than one button on the original remote control is programmed on a single receiver of the system (for example, the first button fully opens, while the second controls the pedestrian opening). It allows you to duplicate all the buttons of the original remote control onto both buttons of PRIME and is only applicable for NICE® models.

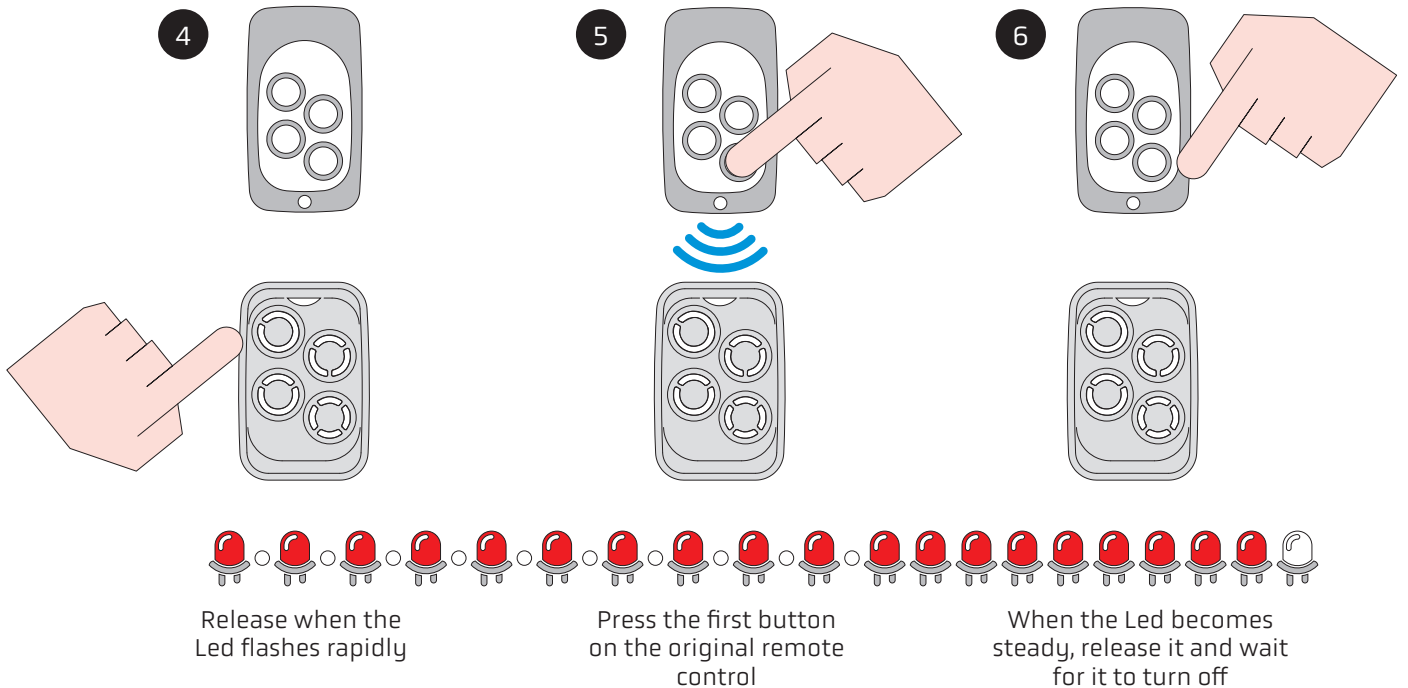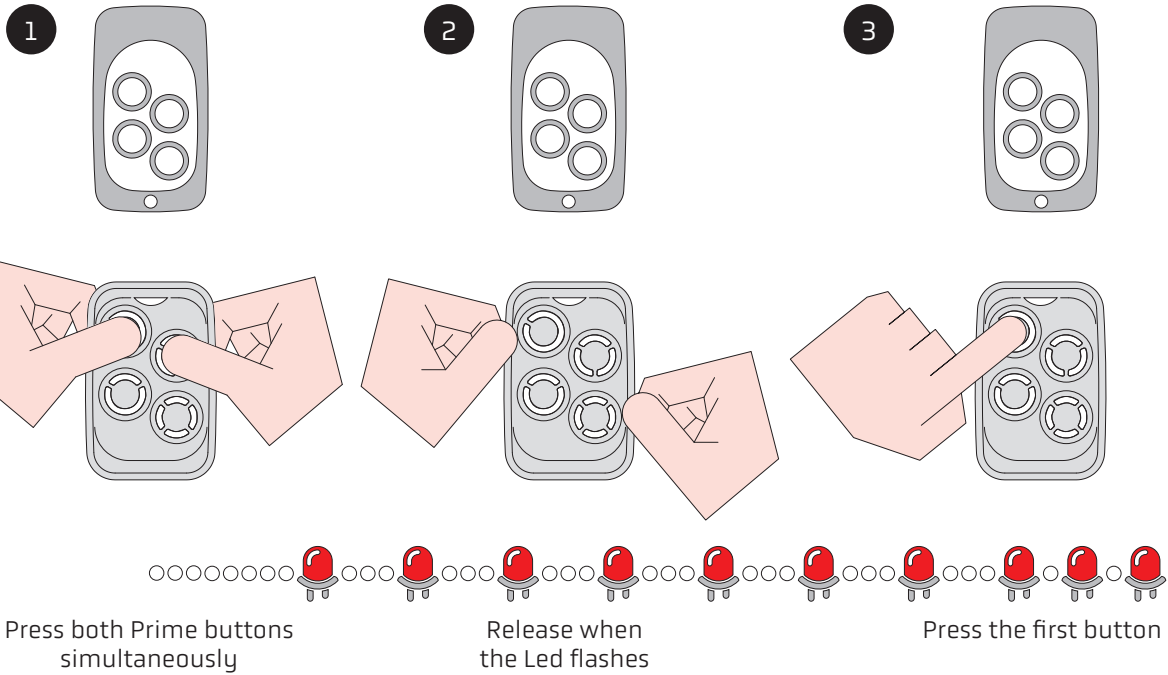


Once the procedure is complete, all the buttons will transmit the signal with the RED LED. To make them work, you will need to perform **AUTOMATIC RADIO RECEIVER STORAGE** activated by the first stored button. After completing the procedure in front of the system receiver, all the buttons will be stored on all the receiver's channels.



# CONTINUOUS TRANSMISSION PROCEDURE

This procedure is performed after the Prime remote control has already been programmed and is functioning, and allows the signal to be transmitted until the button is released.

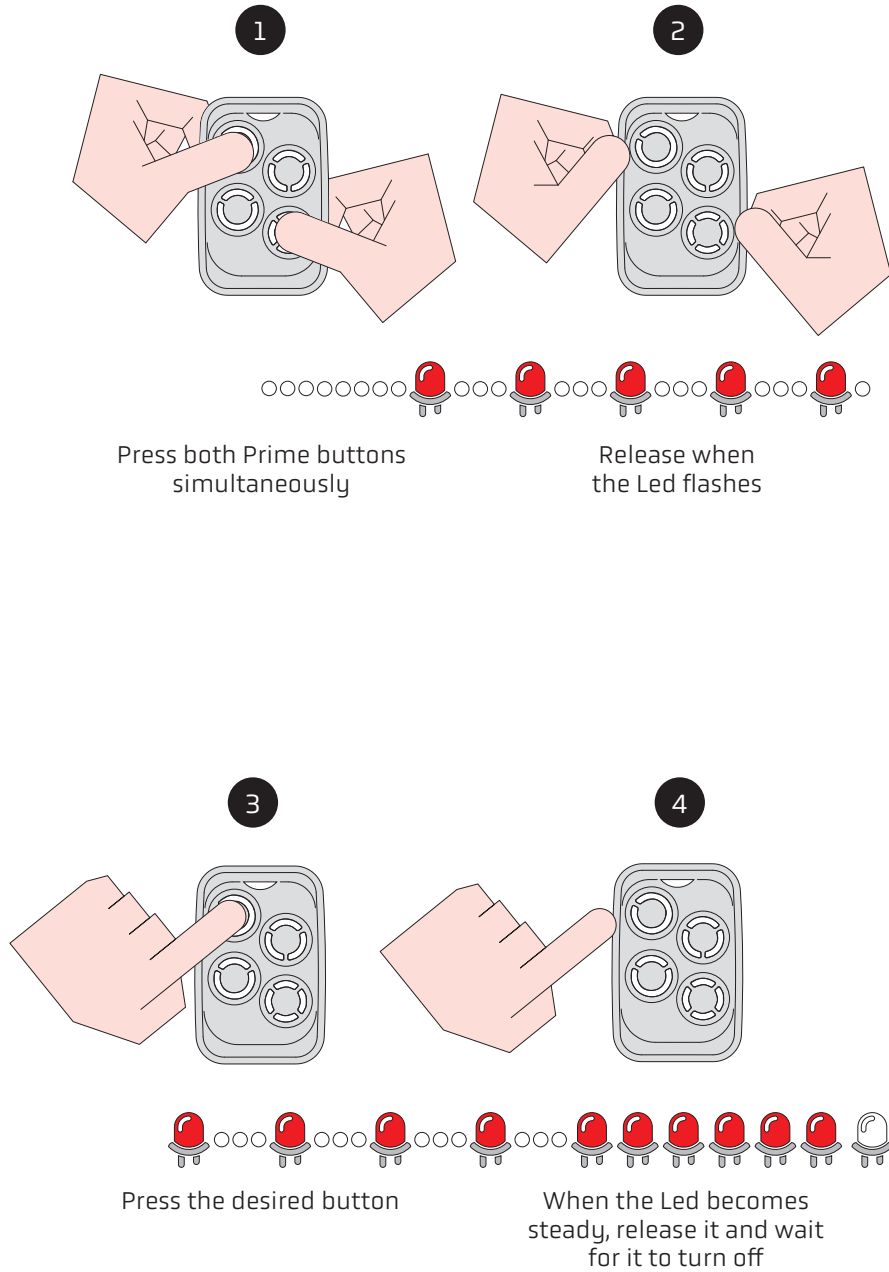




## MANUAL RECEIVER STORAGE


The programming must always be performed with the gate closed, by manually pressing the button on the radio board of the system. On the receiver, press the button (which may have different names depending on the brand) MEMO, PRG, PGM, RADIO, CODE, or P, and then press the button of the programmed remote control.

**Attention!** It is recommended to consult the system's user manual as it may vary by brand and model.


### GENERIC EXAMPLE

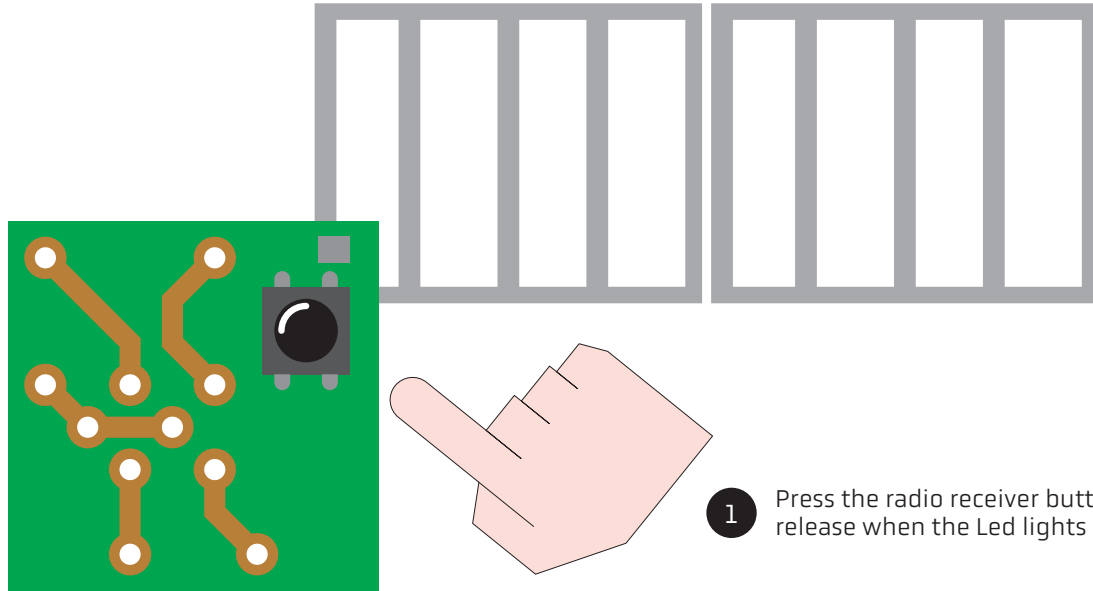

- 1 Press the radio receiver button and release when the Led lights up

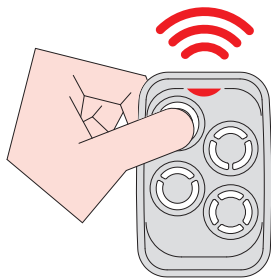

- 2 Press the programmed button and release it when the Led on the receiver flashes or goes off to confirm

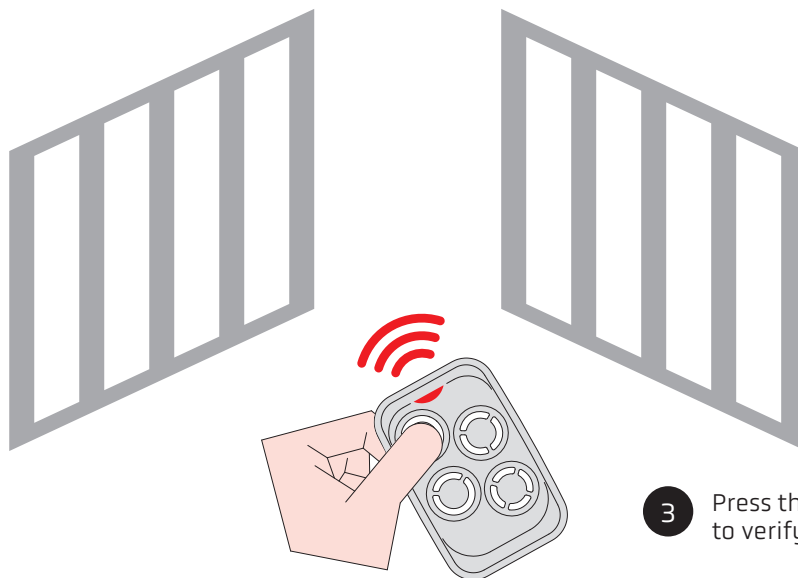


- 3 Press the programmed key to verify correct operation





## AUTOMATIC RADIO RECEIVER STORAGE

Storage must always be performed with the gate closed.

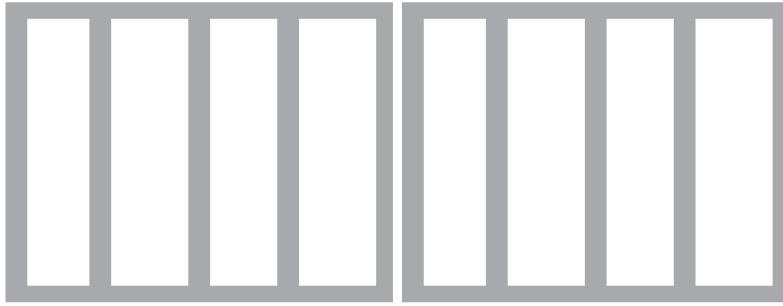

1 Press the programmed button

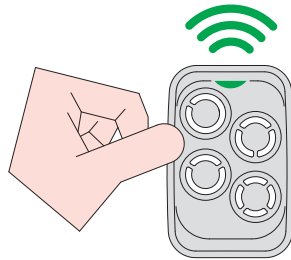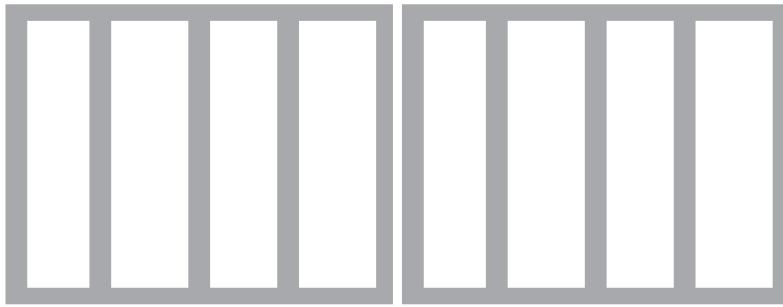

2 Release when the green Led flashes



3 Once the green flashing is over, press the same button again to confirm operation.

**Attention!** It is possible that at the end of the whole procedure it may be necessary to press the button on the original remote control several times until it works again.



## DIRECT LEARNING

Once the key has been programmed, the radio control will be functional immediately.




- 1 Press the button one or more times until the gate opens






## HIDDEN BUTTON/SOURCE FUNCTION

1

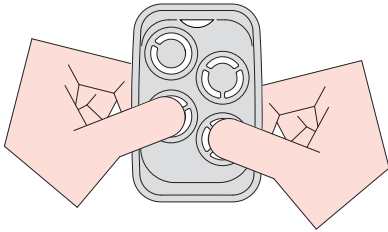

Press both buttons  
simultaneously

2

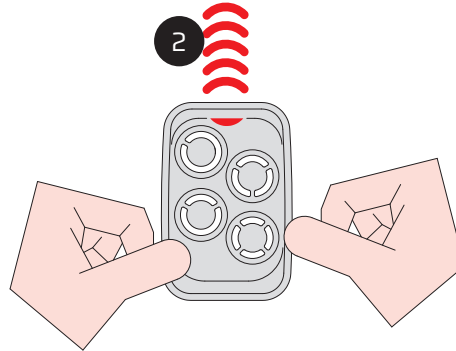

Release when  
the Led flashes

3



Press the programmed  
button: as long as it is  
held down, it will transmit  
the source code